

## Test srl Italy

Strada delle Macchie 1A 06053 Deruta - Perugia  
Tel: 075 8788003 075 4657020 Fax: 075 8788013

Mobile 335 6158054

e-mail: [testinst@tin.it](mailto:testinst@tin.it)

Sito: [www.test-italy.com](http://www.test-italy.com)

THE NEW VALUE FRONTIER



# KC200GHT-2

High efficiency multicrystal photovoltaic module



## EXAMPLES OF APPLICATION

- Grid-connected systems, for e.g.
  - Residential Solar Power Systems
  - Public and Industrial Solar Power Systems
- Solar power stations

## CUTTING-EDGE TECHNOLOGY

Exhaustive research work, continuous further development of production processes and highly automated production enable polycrystalline Kyocera solar modules to attain an exceptional standard of quality and markedly high levels of efficiency.

The integrated Kyocera high-performance solar cells with a standard size of 15 cm x 15.5 cm achieve over 16 % efficiency, guaranteeing an extremely high annual yield of energy from the photovoltaic system.

To protect against the harshest weather conditions, the cells are embedded between a reinforced glass covering (hailstorm resistance complying with IEC 61215, tested by TÜV) and EVA foil, and are sealed with a PET foil backing. The laminate is set in a sturdy aluminum frame which is easy to assemble.

The back of the junction box is equipped with bypass diodes that eliminate the risk of the individual solar cells overheating (hot spot effect). Many series-connected photovoltaic modules can be easily wired using preassembled solar cables and multi-contact plugs.

Kyocera manufactures all the components at its own production sites – without buying in semi-finished products – to ensure consistently high product quality.



TUVdotCOM Service: Internet platform for tested quality and service  
TUVdotCom-ID: 0000007358  
IEC 61215 and Safety Class II  
Kyocera is ISO 9001 and ISO 14001 certified and registered.




**KYOCERA  
SOLAR**

**We care!**


## SPECIFICATIONS

in mm

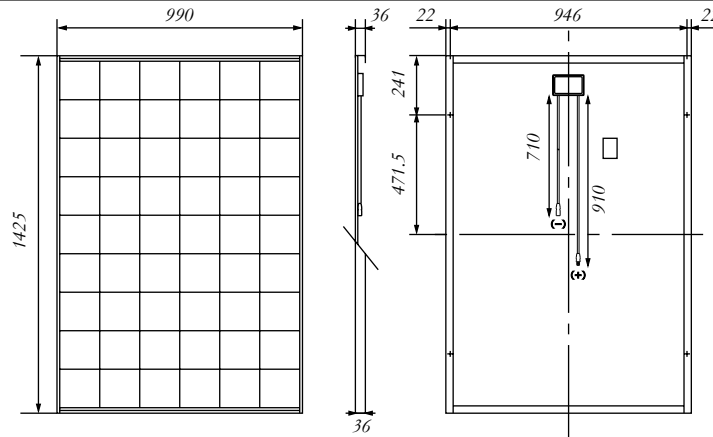


## ELECTRICAL CHARACTERISTICS

Current-Voltage characteristics at various cell temperatures

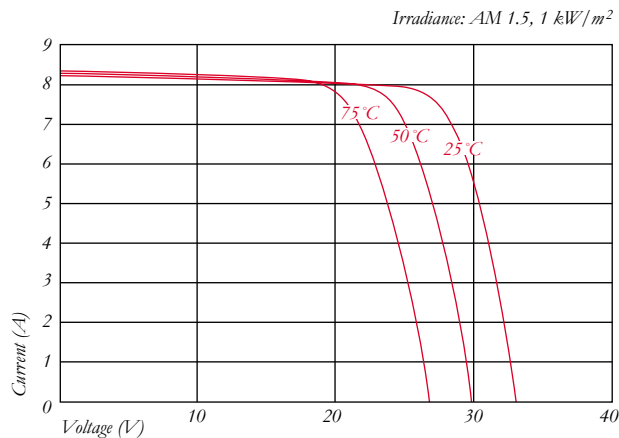

Current-Voltage characteristics at various irradiance levels

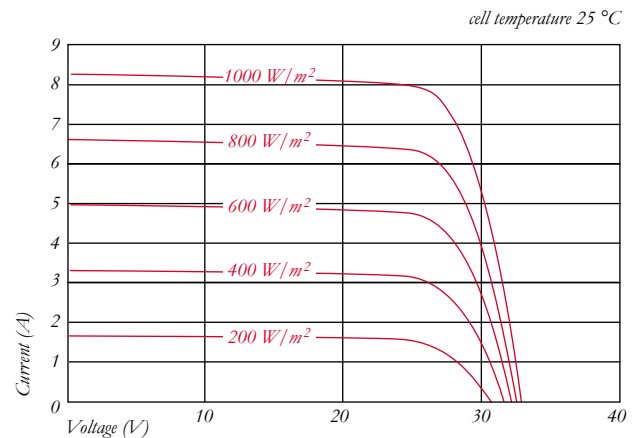

## ELECTRICAL PERFORMANCE

PV module type	KC200GHT-2	
<b>At 1000 W/m<sup>2</sup> (STC)*</b>		
Maximum Power	[W]	200
Maximum System Voltage	[V]	1000
Maximum Power Voltage	[V]	26.3
Maximum Power Current	[A]	7.61
Open Circuit Voltage (V <sub>OC</sub> )	[V]	32.9
Short Circuit Current (I <sub>SC</sub> )	[A]	8.21
<b>At 800 W/m<sup>2</sup> (NOCT)**</b>		
Maximum Power	[W]	142
Maximum Power Voltage	[V]	23.2
Maximum Power Current	[A]	6.13
Open Circuit Voltage (V <sub>OC</sub> )	[V]	29.9
Short Circuit Current (I <sub>SC</sub> )	[A]	6.62
NOCT	[°C]	47
Power tolerance	[%]	+10 / -5
Temperature Coefficient of V <sub>OC</sub>	[V/°C]	-1.23x10 <sup>-1</sup>
Temperature Coefficient of I <sub>SC</sub>	[A/°C]	3.18x10 <sup>-3</sup>
Reduction of efficiency (from 1000 W/m <sup>2</sup> to 200 W/m <sup>2</sup> )	[%]	7.8

## DIMENSIONS

Length	[mm]	1425
Width	[mm]	990
Depth / incl. junction box	[mm]	36 / 36
Weight	[kg]	18.5
Cable	[mm]	(+)910 / (-)710
Connection type		MC-PV3
Junction box	[mm]	113.6x76x9
IP Code		IP65

## GENERAL INFORMATION

Performance guarantee	10*** / 20 years****
Warranty	2 years

## CELLS

Number per module	54
Cell Technology	multicrystal
Cell Shape (rectangular)	[mm] 150x155
Cell Bonding	3 busbar

\* Electrical values under standard test conditions (STC): irradiation of 1000 W/m<sup>2</sup>, airmass AM 1.5 and cell temperature of 25 °C

\*\* Electrical values under normal operating cell temperature (NOCT): irradiation of 800 W/m<sup>2</sup>, airmass AM 1.5, wind speed of 1 m/s and ambient temperature of 20 °C

\*\*\* 10 years on 90% of the minimally specified power P under standard test conditions (STC).

\*\*\*\* 20 years on 80% of the minimally specified power P under standard test conditions (STC).

Your local Kyocera dealer:

**Test srl Italy**

Strada delle Macchie 1A 06053 Deruta - Perugia  
 Tel: 075 8788003 075 4657020 Fax: 075 8788013  
 Mobile 335 6158054  
 e-mail: [testinst@tin.it](mailto:testinst@tin.it)  
 Site: [www.test-italy.com](http://www.test-italy.com)

**KYOCERA  
SOLAR**

**We care!**

**KYOCERA Fin ceramics GmbH  
Solar Division**  
 Fritz-Mueller-Str. 107  
 73730 Esslingen/Germany  
 Tel: +49 (0)711 939 34-999  
 Fax: +49 (0)711 939 34-950  
 Email: [solar@kyocera.de](mailto:solar@kyocera.de)  
[www.kyocerasolar.de](http://www.kyocerasolar.de)